




### FEATURES

- Supports HDMI Version 1.4 (3D Video Formats, Audio Return Channel)
- 5-HDMI 1.4 Ports, 4-HDMI 1.3 Ports
- Displayports output up to 2560x1600 (25~ 300MHz)
- Built-In HD-SDI for Broadcast System (Up to 1920x1080P/60Hz)
- D5, D-TV, S-Video, Analog, DVI, CVBS, HDMI, Displayport, HD-SDI, SCART Output
- Analog RGB Support up to 2048x2048
- 6.4" Front Panel Monitor/Key pad
- Compact Memory Card Data Storage Support
- USB, RS-232C, PC Edit Tool
- Support for Teletext, Closed Caption, and V-Chip Functions
- Optional Remote Controller Available

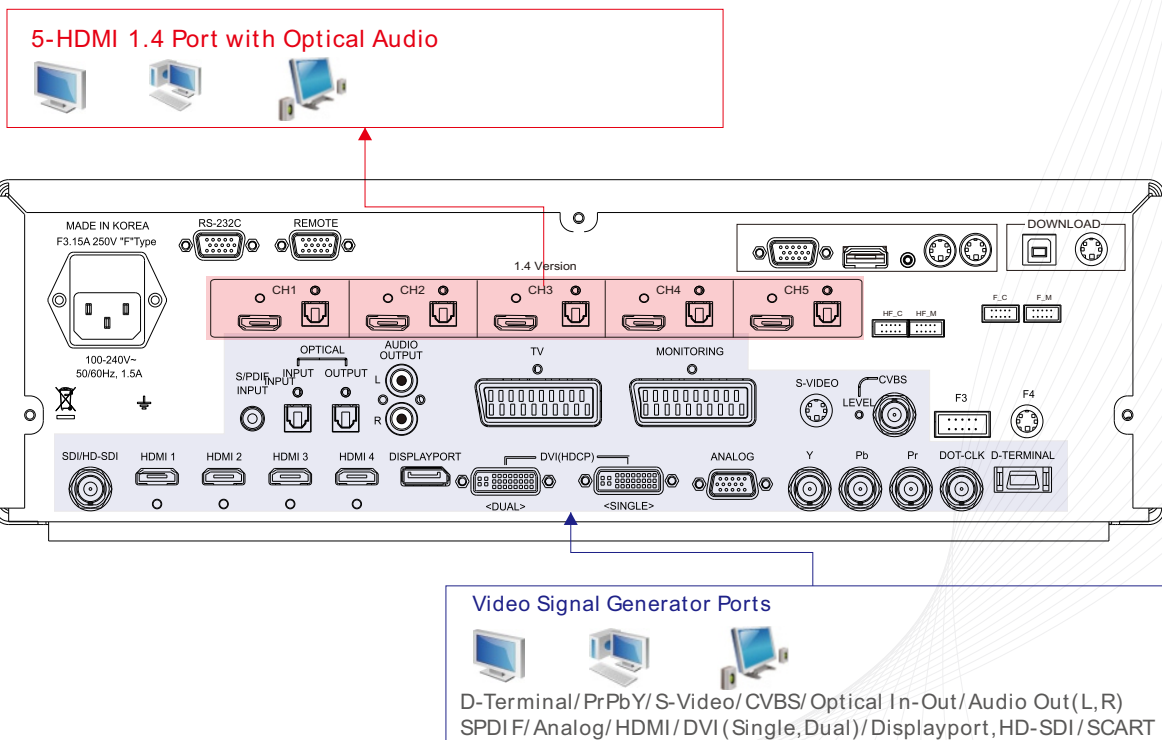

## SPECIFICATION

## Signal Generator with **DISPLAYPORT, HD-SDI, & HDMI 1.4**

Displayport	Pixel Clock	25~ 300MHz
	Display Size	2560 X 1600
	Link Rate	Max. 10.8Gbps (2.7GHz-1,2,4 Lanes / 1.6GHz-1,2,4 Lanes)
	Output Format	RGB444, YCbCr444 (8,10 Bit) / YCbCr422 (8,10,12 Bit)
	Compliant	Displayport 1.1a Version
	Audio	SPDIF, 192KHz, 2 Channels
HD/SDI	Output Format	YCbCr422
	Data Bit	8,10,12 Bit
	Output Time	480i, 576i, 720p, 1080i
	Output Bits Rate	2.97Gbps
	Display Size	1920 X 1080P/60Hz
	Audio	I2S, 48KHz Only, 2 Channels
H/V Frequency	Horizontal	10~ 300KHz / 1 Dot Resolution
	Vertical	10~ 300Hz / 1 Line Resolution
Analog Output	Display Size	4096 X 4096
	Pixel Clock	8~ 330MHz
	Video Level	R, G, B (Load 75 ohms, 0~ 1.0V Programmable)
	Output Connector	15P D-Sub, DVI-I
	EDID	Read
	Separate Sync	HS, VS (3.0V~5.5Vp-p Programmable / Inherited Sync Level is 4.8Vp-p)
DVI (TMDS) Output	Pixel Clock	Single Link : 25~ 165MHz / * Dual Link : 25~ 330MHz
	Transfer Type	Single TMDS 24 Bit Input Mode / * Dual TMDS 12 Bit Input Mode
	EDID	Read
	HDCP	Support Single & Dual
	Compliant	DVI 1.0 Support
	Video Signal Type	RGB
	Output Connector	DVI-I (DVI 2 Ports, Single/Dual)
	Data Bit	8~ 16 Bit
CVBS Output	Output Mode	NTSC M,J (3.58MHz)
		NTSC443 (4.4MHz)
		PAL B,D,G,H,I (4.434MHz)
		SECAM (For= 4.406MHz / For= 4.25MHz)
	Subcarrier Stability	25ppm (± 25Hz / 1MHz)
	Video Output	Composite(BNC), S-Video
		Signal : CVBS (Connector : BNC)
		Signal : Y/C (Connector : 4Pin-Mini Din)
	Closed Caption (NTSC)	C1, C2, C3, C4 / T1, T2, T3, T4
	V-Chip	Mpaa Rating : G, PG, PG-13, R, NC-17, X
		FCC Rating : TV-Y, TV-Y7, TV-G, TV-PG, TV-14, TV-MA
Teletext (PAL)	Teletext System B Level 1, 1.5	
Separate Sync	1~ 318mV Programmable	
D-TV Output	Signal	Y, Pb, Pr
	Connector	BNC, D5
	Time	480i/p, 576i/p, 720p, 1080i/p for ATSC and DVB Format
	Separate Sync	50~ 400mV Programmable
	Note	Support D Terminal for Japanese D-TV (Adjustable to 16:9, 4:3 aspect ratio)

## Signal Generator with DISPLAYPORT, HD-SDI, & HDMI 1.4

HDMI (TMDS) Video Output	Compliant	HDMI 1.3 Version (CEC Support)
	Pixel Rate Range	25~ 165MHz (TMDS Clock : 25~ 225MHz)
	Standard Spec	EIA/CEA-861D
	Video Signal Type	RGB, YCbCr
	Pixel Encoding	RGB444, YCbCr444, YCbCr422
	Data bit of RGB & YCbCr	8, 10, 12 (RGB & YCbCr)
	Color Space	RGB, BT-601, BT-709, xvYCC-601, xvYCC-709
	HDCP	Support HDCP 1.1 Version
	EDID	Read
	Output Connector	Type A, HDMI 4 Port
	Note	Support Deep Color & xvYCC
HDMI Audio Output	Sample Rate	32 / 44.1 / 48 / 88.2 / 96 / 176.4 / 192KHz
	Number of Channel	2 Channels
	Bit per Sample	24
	Waveform	Sine Wave
	Frequency Range	20Hz to 20KHz / 5Hz step
	Level Range	0mV to 2.0V / 100mV step
	External Audio Input	S/PDIF
	Special Control Mode	Fix, Sweep, Swap, Mute
Audio (Analog) Output	Frequency Range	20Hz to 20KHz / 5Hz step
	Level Range	0mV to 2.0V / 100mV step
	Waveform	Sine Wave
	Number of Channel	2 Channels
	Connector	RCA
	Special Control Mode	Fix, Sweep, Swap, Mute
Scart Output	Signal Mode	RF Input Mode, CVBS Mode, RGB Mode, Y/C Mode
	Connector	SCART 21Pin
Scan & Function Group	Scan Storage	99 Group (1 Group ; 24 Step)
	Function Storage	99 Group (1 Group ; 32 Step)
Data Storage Device	Timing	999 Timing (User: 1~ 500, Default: 501~ 999)
	Pattern	999 Pattern (User: 1~ 500, Default: 501~ 999)
	Compact Memory Card	512MB
General Specification	Power Consumption	AC 100~ 240VAC, 50/60Hz Auto Switch
	Operating Conditions	Temperature : 0~ 40°C
		80% Humidity, Non-condensing
Dimension(WXDXH)	440 X 355 X 145mm, Weight : 6Kg	
Others	Max Image	2048 X 2048 Bit Map Image Size
	User Interface	Front Panel (6.4 inch / Graphic LCD) Key Pad
		Possible to Timing Parameter Edit
		USB, RS-232C, PC EDIT Tool
HDMI Ver1.4	Audio Return Channel (ARC) 3D Video Formats (Frame Packing, Top & Bottom, Side by Side(Half) etc.)	

\* All specifications are subject to change without any notice.