




FEATURES

- Built-in Media Player (D5 ,D-TV, S-video,CVBS,RGB,HDMI,DVI,Displayport/SDI)
- Built in HDD for store media
- D5, D-TV, S-Video, Analog, DVI, CVBS, HDMI, Displayport, SDI, SCART Output
- 6.4" Front Panel Monitor/Key pad
- Compact Memory Card Data Storage Support
- USB, RS-232C, PC Edit Tool
- 2 Channel Analog Audio Output
- Support for Teletext, Closed Caption, and V-Chip Functions
- Optional Remote Controller Available

Multimedia Player Ports

D-Terminal/PrPbY/S-Video/CVBS/Optical Out/Audio Out(L,R)
Analog/HDMI/DVI(Dual)/Displayport/SDI(HD-SDI)/USB, RS232C

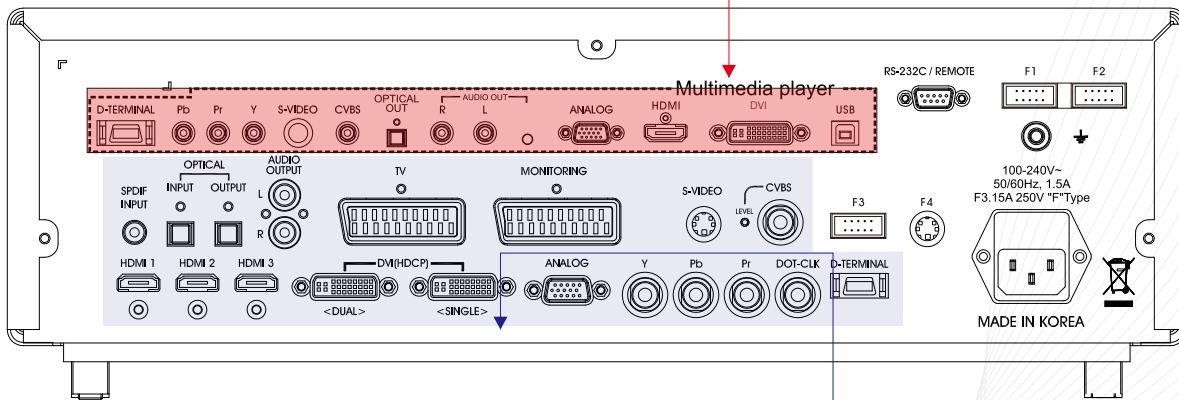

Video Signal Generator Port

D-Terminal/PrPbY/S-Video/CVBS/Optical In-Out/Audio Out(L,R)/SPDIF
Analog/HDMI/DVI(Single,Dual)/Displayport/SDI(HD-SDI)/SCART

SPECIFICATION

H/V Frequency	Horizontal	10~300KHz / 1 Dot Resolution
	Vertical	10~300Hz / 1 Line Resolution
Analog Output	Display Size	4096 X 4096
	Pixel Clock	8~330MHz
	Video Level	R, G, B (Load 75 ohms, 0~1.0V Programmable)
	Output Connector	15P D-Sub, DVI-I
	EDID	Read
	Separate Sync	HS, VS (3.0V~5.5Vp-p Programmable / Inherited Sync Level is 4.8Vp-p)
DVI (TMDS) Output	Pixel Clock	Single Link : 25~165MHz / * Dual Link : 25~330MHz
	Transfer Type	Single TMDS 24 Bit Input Mode / * Dual TMDS 12 Bit Input Mode
	EDID	Read
	HDCP	Support Single & Dual
	Compliant	DVI 1.0 Support
	Video Signal Type	RGB
	Output Connector	DVI-I (DVI 2 Ports, Single/Dual)
	Data Bit	8~16 Bit
D-TV Output	Signal	Y, Pb, Pr
	Connector	BNC, D5
	Time	480i/p, 576i/p, 720p, 1080i/p for ATSC and DVB Format
	Note	Support D Terminal for Japanese D-TV (Adjustable to 16:9, 4:3 aspect ratio)
	CVBS Output	Output Mode
NTSC443 (4.4MHz)		
PAL B,D,G,H,I (4.434MHz)		
SECAM (For=4.406MHz / For=4.25MHz)		
Subcarrier Stability		25ppm (± 25 Hz / 1MHz)
Video Output		Composite(BNC), S-Video
		Signal : CVBS (Connector : BNC)
		Signal : Y/C (Connector : 4Pin-Mini Din)
Closed Caption (NTSC)		C1, C2, C3, C4 / T1, T2, T3,T4
V-Chip		MPEG Rating : G, PG, PG-13, R, NC-17, X
	FCC Rating : TV-Y, TV-Y7, TV-G, TV-PG, TV-14, TV-MA	
Teletext (PAL)	Teletext System B Level 1, 1.5	
HDMI (TMDS) Video Output	Compliant	HDMI 1.3 Version (CEC Support)
	Pixel Rate Range	25~165MHz (TMDS Clock : 25~225MHz)
	Standard Spec	EIA/CEA-861D
	Video Signal Type	RGB, YCbCr
	Pixel Encoding	RGB444, YCbCr444, YCbCr422
	Data bit of RGB & YCbCr	8, 10, 12
	Color Space	RGB, BT-601, BT-709, xvYCC-601, xvYCC-709
	HDCP	Support HDCP 1.1 Version
	EDID	Read
	Output Connector	Type A, HDMI 3 Port
	Note	Support Deep Color & xvYCC

HDMI Audio	Sample Rate	32 / 44.1 / 48 / 88.2 / 96 / 176.4 / 192KHz
	Number of Channel	2 Channels
	Bit per Sample	24
	Waveform	Sine Wave
	Frequency Range	20Hz to 20KHz / 5Hz step
	Level Range	0mV to 2.0V / 100mV step
	External Audio Input	S/PDIF
	Special Control Mode	Fix, Sweep, Swap, Mute
Audio (Analog)	Frequency Range	20Hz to 20KHz / 5Hz step
	Level Range	0mV to 2.0V / 100mV step
	Waveform	Sine Wave
	Number of Channel	2 Channels
	Connector	RCA
	Special Control Mode	Fix, Sweep, Swap, Mute
Media Player	CVBS	NTSC, PAL
	D-TV (YPbPr)	480i/p, 576i/p, 720p, 1080i/p
	Analog	15P D-SUB
	HDMI / DVI	1.2 Version (CEC Support) / Single
	Video Format	MPG, AVI, WMV, ASF, TP, VOB, MP4, TRP
	Audio Format	MP3, WMA, AAC, PCM, AC3, WAV, BSAC, WMAPRO
	Image Format	JPEG, BMP, PNG, GIF
	Storage Capacity	2.5"HDD (80GB)
	Connector	D5, CVBS(RCA), S-VIDEO, DTV, HDMI, DVI, ANALOG
	Scart Output	Signal Mode
Connector		SCART 21Pin
Scan & Function Group	Scan Storage	99 Group (1 Group ; 24 Step)
	Function Storage	99 Group (1 Group ; 32 Step)
Data Storage Device	Timing	999 Timing (User:1~500, Default:501~999)
	Pattern	999 Pattern (User:1~500, Default:501~999)
	Compact Memory Card	512MB
General Specification	Power Consumption	AC 100~240VAC, 50/60Hz Auto Switch
	Operating Conditions	Temperature : 0~40℃
		80% Humidity, Non-condensing
Dimension(WXDXH)	440 X 355 X 145mm, Weight : 6Kg	
Others	Max Image	2048 X 2048 Bit Map Image Size
	Moving	2 Dot, 2 Line Control
	User Interface	Front Panel (6.4 inch / Graphic LCD) Key Pad
		Possible to Timing Parameter Edit
		USB, RS-232C, PC EDIT Tool

* All specifications are subject to change without any notice.

Optional Remote Controller



MSRC-005L